


PIPE OD RANGE				LINKS	
MIN (in)	MAX (in)	MIN (mm)	MAX (mm)	SHORT*	LONG
2.1	3.0	53	76	1	0
3.0	3.9	76	99	2	0
3.9	4.8	99	122	3	0
4.9	5.8	124	147	4	0
5.8	6.6	147	168	5	0
6.6	7.5	168	191	6	0
7.4	8.3	188	211	7	0
8.3	9.1	211	231	8	0
9.1	10.0	231	254	9	0
10.0	10.8	254	274	7	1
10.8	11.6	274	295	8	1
11.5	12.4	292	315	9	1
12.7	13.5	323	343	1	4
13.5	14.3	343	363	2	4
14.2	15.0	361	381	3	4
15.0	15.8	381	401	4	4
15.8	16.7	401	424	2	5
16.6	17.4	422	442	3	5
17.3	18.2	439	462	4	5
18.2	19.0	462	483	2	6
19.0	19.8	483	503	3	6
19.7	20.6	500	523	4	6
20.5	21.3	521	541	5	6
21.2	22.1	538	561	6	6
22.0	22.9	559	582	7	6
22.8	23.7	579	602	8	6
23.6	24.5	599	622	9	6
24.5	25.4	622	645	1	9
25.3	26.1	643	663	2	9
26.1	26.9	663	683	3	9
26.8	27.7	681	704	4	9
27.7	28.5	704	724	2	10
28.4	29.3	721	744	3	10
29.2	30.1	742	765	4	10
30.0	30.9	762	785	2	11
30.8	31.6	782	803	3	11
31.6	32.4	803	823	4	11
32.4	33.2	823	843	2	12
33.2	34.0	843	864	3	12
33.9	34.8	861	884	4	12
34.7	35.6	881	904	5	12
35.5	36.4	902	925	6	12
36.3	37.2	922	945	7	12
37.1	38.0	942	965	8	12
37.9	38.8	963	986	9	12

\*Short includes: Short Link, Dovetail Link, Red Catch Link.  
 Ø 1.5 in is possible by pivoting nose to horizontal position.

# SINGLE WHEEL CHAIN SCANNER: Key Parts

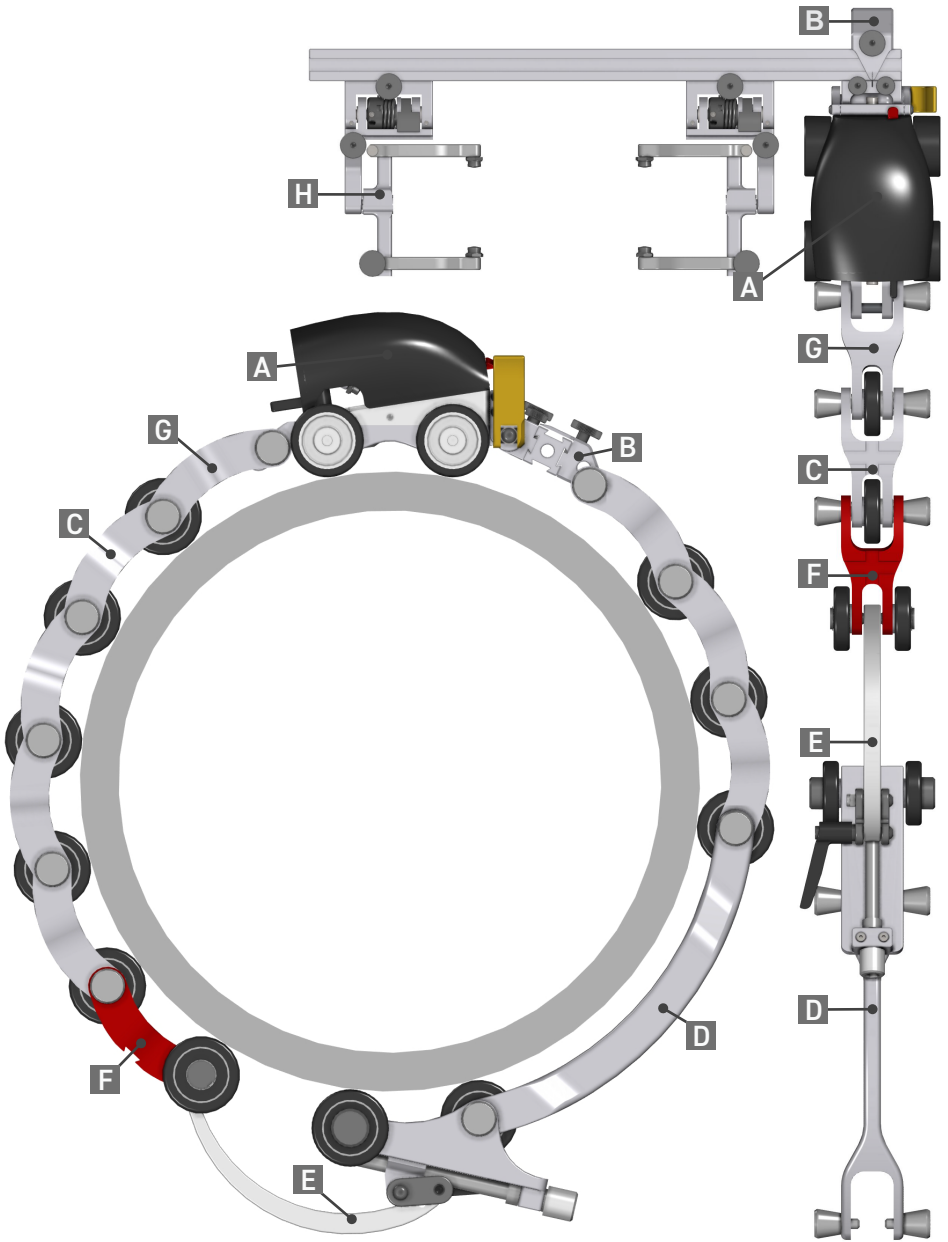

**A** Scanner Body

**B** Chain Mount

**C** Dovetail Link

**D** Long Link

**E** Buckle

**F** Catch Link

**G** Short Link

**H** Probe Holder